

# HC 1217W

## 12V 17W

HC 1217W is specially designed for high efficient discharge application. Its invisible terminal can be inserted PC board directly. HC series battery can serve more than 260 cycles at 100% discharge in cycle service, or three to five years in standby service.



### Specification


<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Capacity</b>	17W @ 15minute-rate to 1.67V per cell @25 °C(77°F)
<b>Weight</b>	Approx. 1.73kg(3.82 lbs)
<b>Maximum Discharge Current</b>	60A(5sec)
<b>Internal Resistance</b>	Approx. 40mΩ
<b>Operating Temperature Range</b>	Discharge: -20°C~50°C(-4°F~122°F) Charge: 0°C~40°C(32°F~104°F) Storage: -20°C~40°C(-4°F~104°F)
<b>Nominal Operating Temperature Range</b>	25°C±3°C(77°F±5°F)
<b>Float Charging Voltage</b>	13.5 to 13.8 VDC/unit Average at 25°C(77°F)
<b>Recommended Maximum Charging Current Limit</b>	1.7A
<b>Equalization and Cycle Service</b>	14.4 to 15.0 VDC/unit Average at 25°C(77°F)
<b>Self Discharge</b>	CSB Batteries can be stored for more than 6 months at 25°C(77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
<b>Terminal</b>	Faston Tab 187/250
<b>Container Material</b>	-ABS (UL94-HB)*Flammability resistance of UL94-V2 can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 as well as ISO 9001 and ISO 14001 certified.

### Dimensions

unit: (MM)

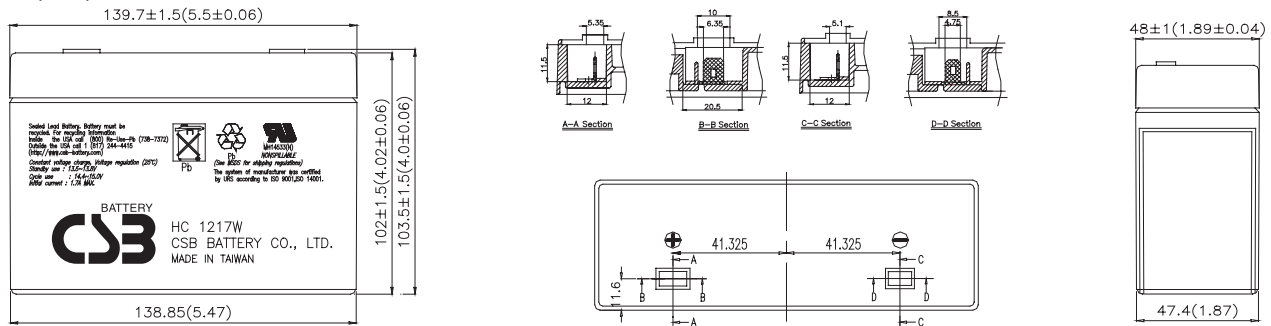

### Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	29.8	21.6	18.5	15.1	12.7	9.33	8.26	6.13	3.44	2.11
1.67V	26.4	20.5	17.3	14.7	12.4	9.16	8.08	6.03	3.38	2.07
1.70V	25.0	20.1	16.8	14.5	12.3	9.08	8.00	5.98	3.35	2.05
1.75V	23.4	18.6	15.5	13.6	11.9	8.75	7.75	5.86	3.28	1.97
1.80V	21.8	17.1	14.3	12.8	11.5	8.42	7.50	5.73	3.21	1.88
1.85V	20.1	15.6	13.0	11.9	11.1	8.09	7.25	5.61	3.14	1.80

### Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	358	259	222	181	152	112	99.1	73.5	41.3	25.3
1.67V	317	246	208	176	149	110	96.9	72.3	40.5	24.8
1.70V	300	241	202	174	147	109	96.0	71.8	40.2	24.6
1.75V	281	223	187	164	143	105	93.0	70.3	39.4	23.6
1.80V	261	205	171	153	138	101	90.0	68.7	38.5	22.5
1.85V	242	187	156	143	134	97.0	87.0	67.2	37.7	21.5

- All mentioned values are average values.
- Low rate discharge mode (over 90 mins.) is not recommended.


## Trickle (or Float) Service Life

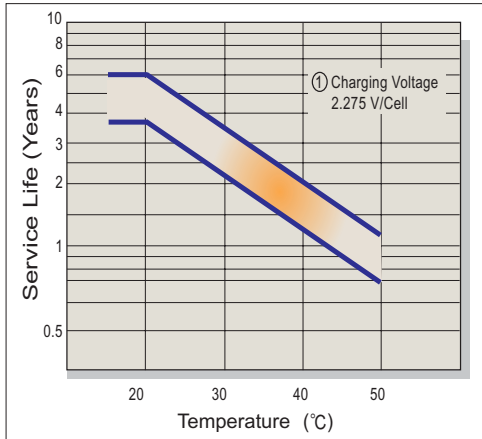


## Capacity Retention Characteristic

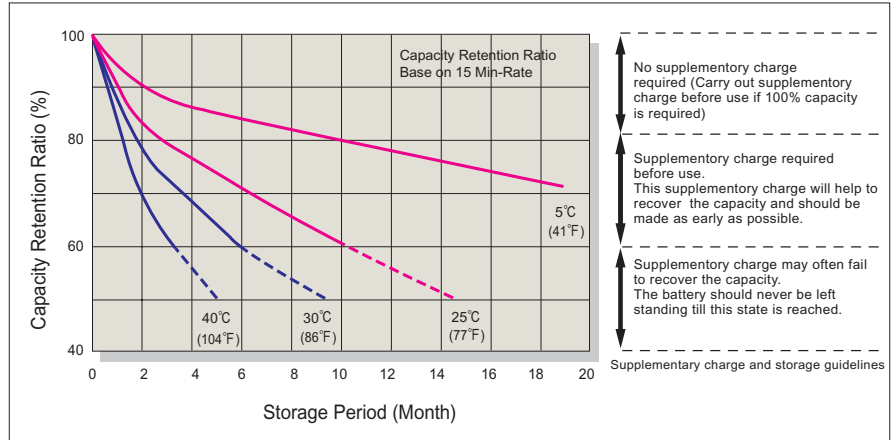


## Battery Voltage and Charge Time for Standby Use

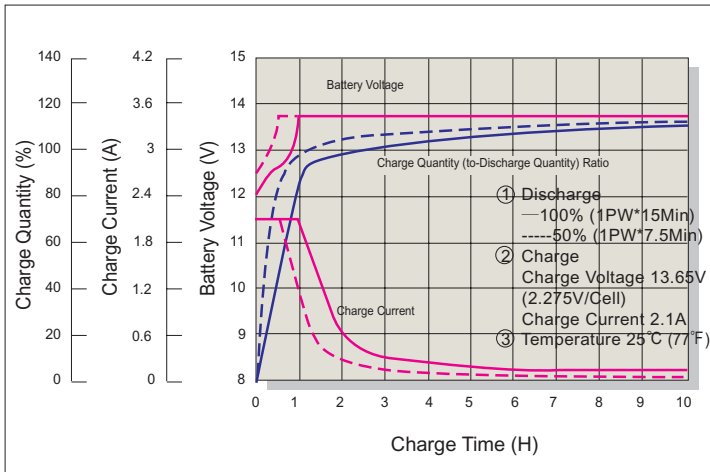


## Cycle Service Life

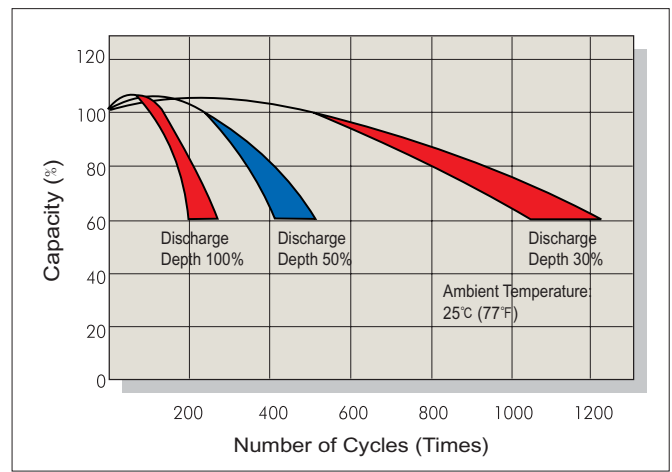

## Battery Voltage and Charge Time for Cycle Use

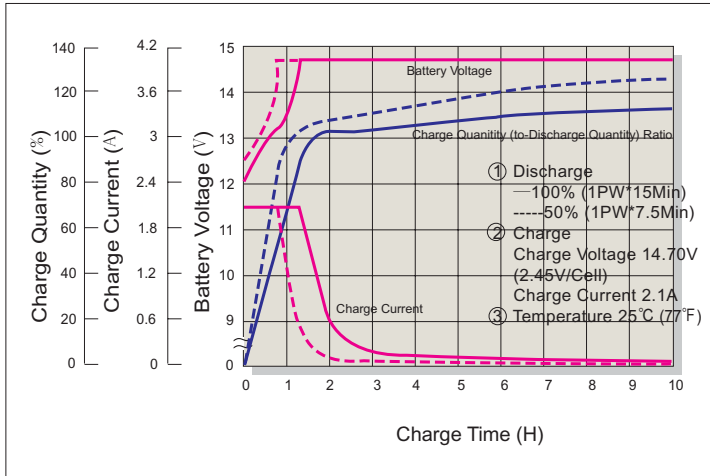

## Terminal Voltage (V) and Discharge Time (25°C 77°F)

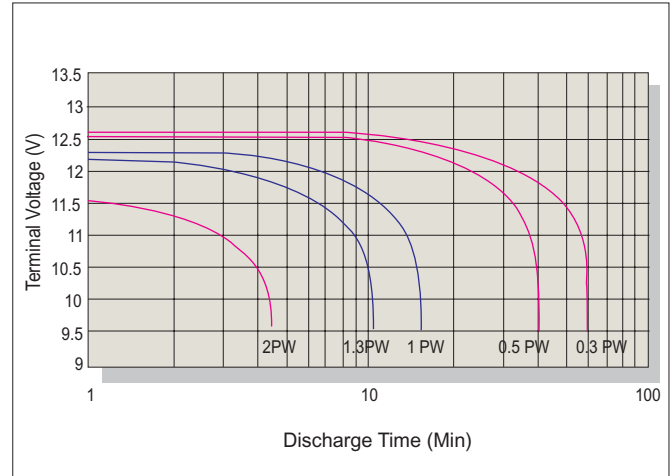

## Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C > (A)	0.2C < (A) < 0.5C	0.5C < (A) < 1.0C	(A) > 1.0C